


### ECONOMY, SCREW TOGETHER HOODS, SHORT SCREWS

### CCOV-ME SERIES

#### TECHNICAL SPECIFICATIONS

Material: Zinc, Nickel Plated  
 Operating Temperature: -40°C to +120°C  
 Cable Entry: Top Entry  
 Cable Diameter: Up to 16 mm  
 Thumbscrews: UNC 4-40

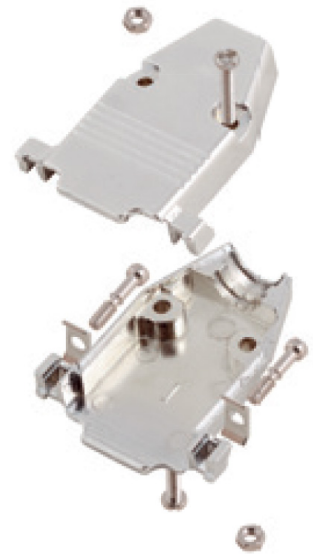



#### FEATURES

- Available in sizes 9-15-25-37-50
- Re-openable
- Suitable for any common Sub-D connector

| Size   | Cable Diameter |
|--------|----------------|
| 9-way  | 7 mm           |
| 15-way | 11 mm          |
| 25-way | 11 mm          |
| 37-way | 16 mm          |
| 50-way | 16 mm          |

| Size   | Product Code |
|--------|--------------|
| 9-way  | CCOV9-ME     |
| 15-way | CCOV15-ME    |
| 25-way | CCOV25-ME    |
| 37-way | CCOV37-ME    |
| 50-way | CCOV50-ME    |

| Size   | Dim A | Dim B | Dim C |
|--------|-------|-------|-------|
| 9-way  | 31,4  | 16,2  | 48,3  |
| 15-way | 40,2  | 16,2  | 48,3  |
| 25-way | 53,0  | 16,2  | 48,3  |
| 37-way | 69,2  | 16,2  | 48,3  |
| 50-way | 67,0  | 19,7  | 48,4  |




### ECONOMY, SCREW TOGETHER HOODS, LONG SCREWS

### CCOV-MEL SERIES

#### TECHNICAL SPECIFICATIONS

Material: Zinc, Nickel Plated  
 Operating Temperature: -40°C to +120°C  
 Cable Entry: Top Entry  
 Cable Diameter: Up to 16 mm  
 Thumbscrews: UNC 4-40

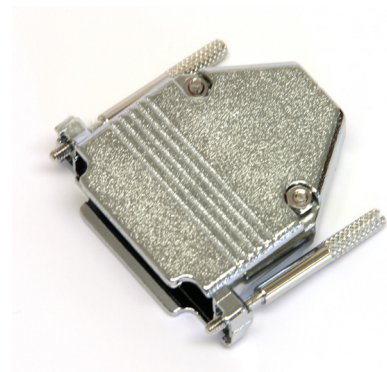

#### FEATURES

- Available in sizes 9-15-25-37-50
- Re-openable
- Suitable for any common Sub-D connector

| Size   | Cable Diameter |
|--------|----------------|
| 9-way  | 7 mm           |
| 15-way | 11 mm          |
| 25-way | 11 mm          |
| 37-way | 16 mm          |
| 50-way | 16 mm          |

| Size   | Product Code |
|--------|--------------|
| 9-way  | CCOV9-MEL    |
| 15-way | CCOV15-MEL   |
| 25-way | CCOV25-MEL   |
| 37-way | CCOV37-MEL   |
| 50-way | CCOV50-MEL   |

| Size   | Dim A | Dim B | Dim C |
|--------|-------|-------|-------|
| 9-way  | 31,4  | 16,2  | 48,3  |
| 15-way | 40,2  | 16,2  | 48,3  |
| 25-way | 53,0  | 16,2  | 48,3  |
| 37-way | 69,2  | 16,2  | 48,3  |
| 50-way | 67,0  | 19,7  | 48,4  |

