




MACHINED, PCB MOUNT STRAIGHT, STANDARD PROFILE

TECHNICAL SPECIFICATIONS



Insulator:	Glass filled Polyester, Black UL94 V-0
Shell:	Stamped Steel, Tin Plated
Contact pins:	Copper Alloy
Machined Pins:	Class 1, 500 inserts min. (DM)
Contact Plating:	Selective Gold over Nickel
Contact current rating:	5 Amps max
Contact resistance:	15mΩ max
Operating temperature:	-50°C to +105°C
Withstanding voltage:	1000V AC for 1 minute
Insulator resistance:	500MΩ min

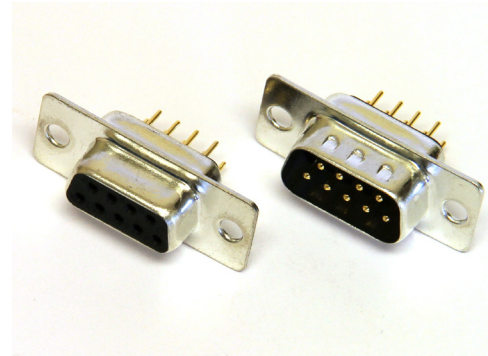

MALE

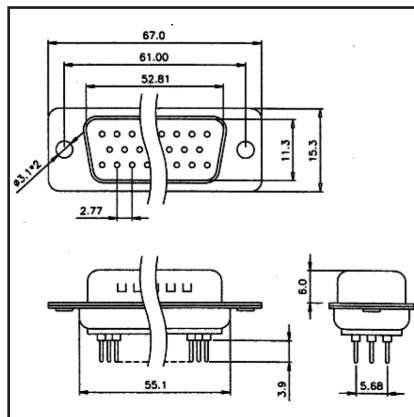
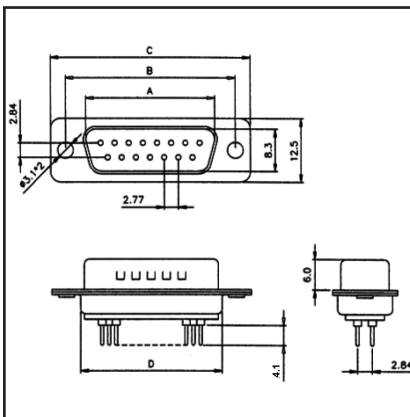


Size	A	B	C	D
9-way	16,92	24,99	30,80	19,2
15-way	25,25	33,32	39,32	27,7
25-way	38,96	47,04	53,00	41,1
37-way	55,42	63,50	69,30	57,3

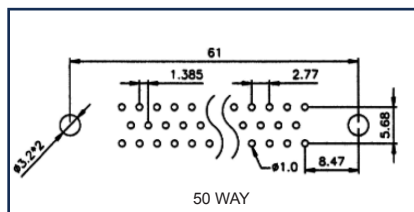
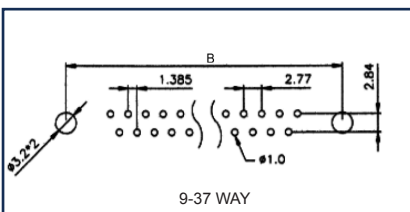


Size	Plug
9-way	DD-09-M-T-B-M
15-way	DD-15-M-T-B-M
25-way	DD-25-M-T-B-M
37-way	DD-37-M-T-B-M
50-way	DD-50-M-T-B-M

FEMALE

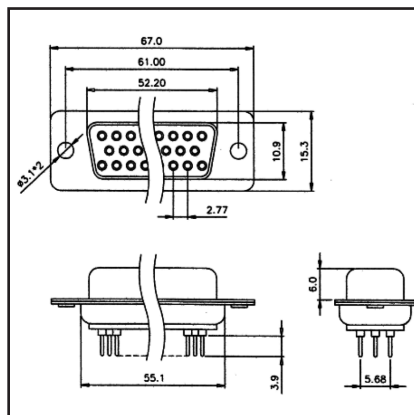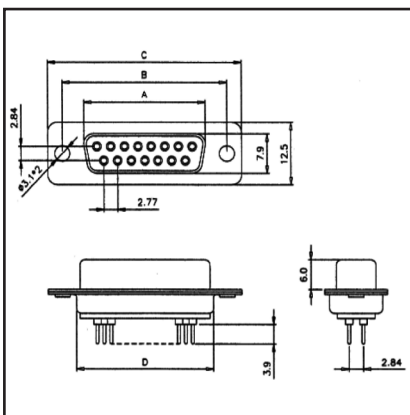

Size	A	B	C	D
9-way	16,30	24,99	30,80	19,2
15-way	24,65	33,32	39,15	27,7
25-way	38,40	47,04	53,00	41,1
37-way	54,80	63,50	69,30	57,3

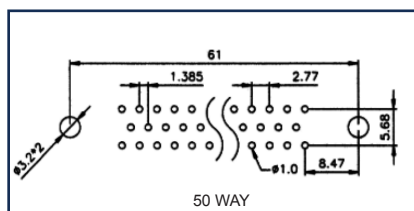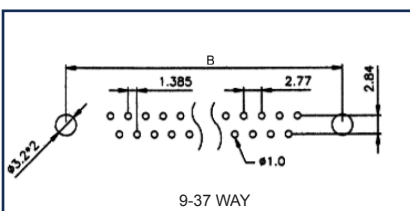

Size	Socket
9-way	DD-09-F-T-B-M
15-way	DD-15-F-T-B-M
25-way	DD-25-F-T-B-M
37-way	DD-37-F-T-B-M
50-way	DD-50-F-T-B-M