




MACHINED, PCB MOUNT RIGHT ANGLE, STANDARD PROFILE

TECHNICAL SPECIFICATIONS



Insulator:	Glass filled Polyester, Black UL94 V-0
Shell:	Stamped Steel, Tin Plated
Contact pins:	Copper Alloy, Machined
Machined Pins:	Class 1, 500 inserts min. (DM)
Contact Plating:	Selective Gold over Nickel
Contact current rating:	5 Amps max
Contact resistance:	10mΩ max
Operating temperature:	-55°C to +105°C
Withstanding voltage:	1000V AC for 1 minute
Insulator resistance:	1000MΩ min

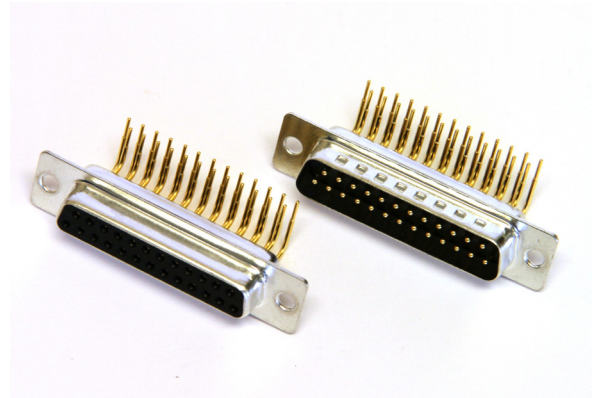

MALE

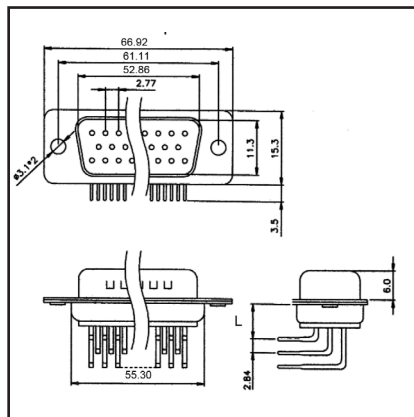
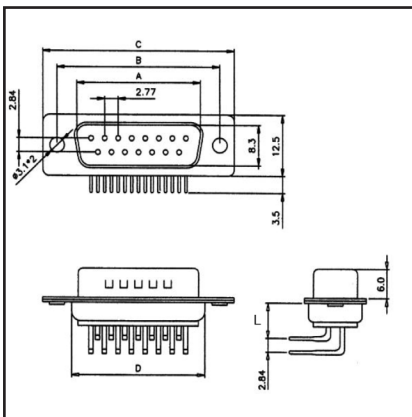


Size	A	B	C	D
9-way	16,92	24,99	30,81	19,23
15-way	25,25	33,32	39,14	27,56
25-way	38,96	47,04	53,04	41,30
37-way	55,42	63,50	69,32	57,30
50-way	52,86	61,11	66,92	55,30

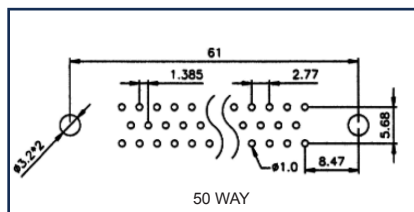
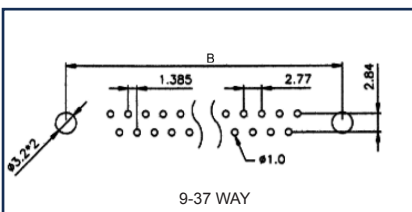


Size	Plug
9-way	DRBM-09M-TBG-9.4
15-way	DRBM-15M-TBG-9.4
25-way	DRBM-25M-TBG-9.4
37-way	DRBM-37M-TBG-9.4
50-way	DRBM-50M-TBG-9.4

FEMALE

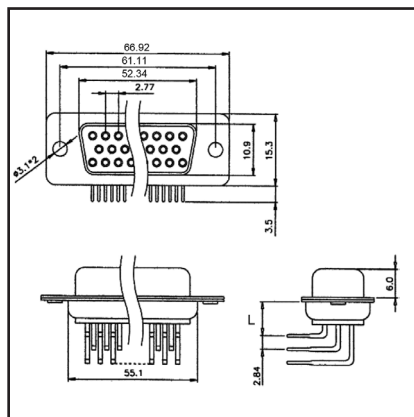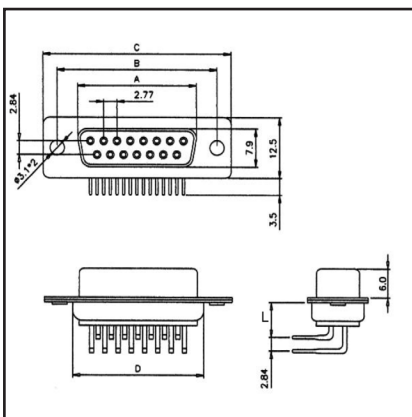

Size	A	B	C	D
9-way	16,33	24,99	30,81	19,28
15-way	24,66	33,32	39,14	27,51
25-way	38,38	47,04	53,04	41,30
37-way	54,84	63,50	69,32	57,71
50-way	52,34	61,11	66,92	55,1

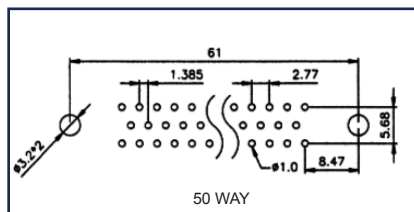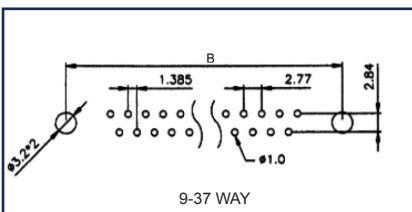

Size	Socket
9-way	DRBM-09F-TBG-9.4
15-way	DRBM-15F-TBG-9.4
25-way	DRBM-25F-TBG-9.4
37-way	DRBM-37F-TBG-9.4
50-way	DRBM-50F-TBG-9.4