



MACHINED, WIRE WRAP, STANDARD PROFILE

TECHNICAL SPECIFICATIONS


Insulator:	Glass filled Polyester, Black UL94 V-0
Shell:	Stamped Steel, Tin Plated
Contact pins:	Copper Alloy
Machined Pins:	Class 1, 500 inserts min. (DM)
Contact current rating:	3 Amps max
Contact resistance:	15mΩ max
Operating temperature:	-50°C to +100°C
Withstanding voltage:	500V AC for 1 minute
Insulator resistance:	1000MΩ min

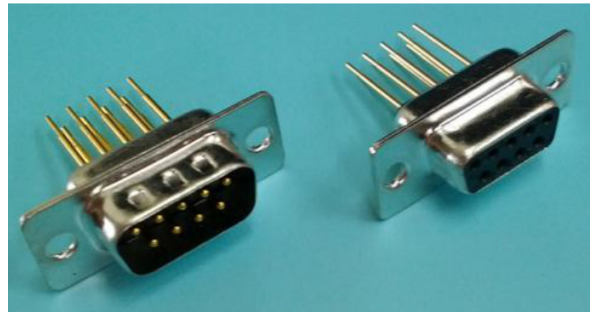

MALE

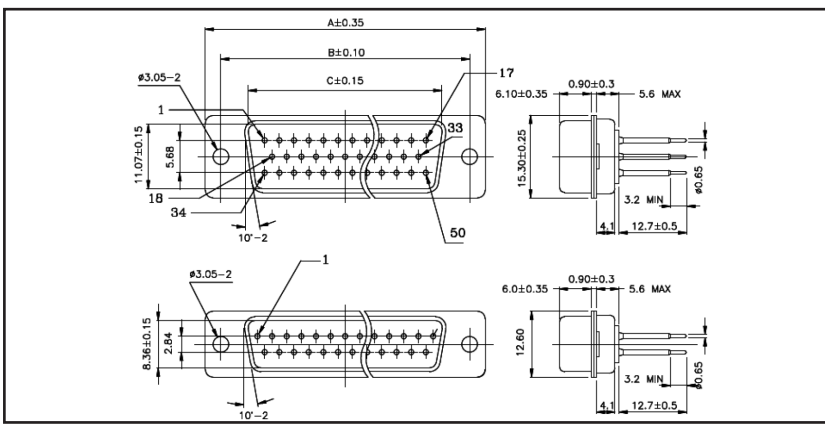


Size	A	B	C
9-way	30,8	25,00	16,92
15-way	39,2	33,32	25,25
25-way	53,0	47,04	38,96
37-way	69,3	63,50	55,42
50-way	67,0	61,00	52,80

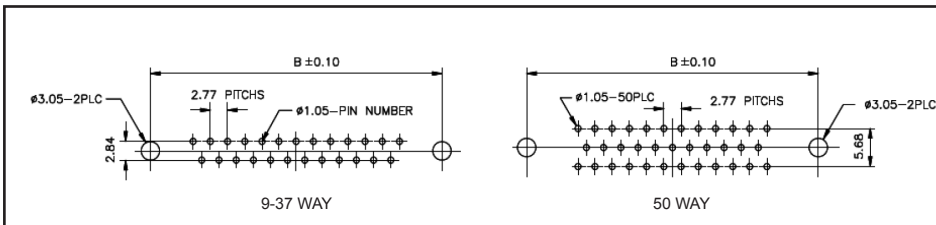


Size	Plug
9-way	DDML-09M-TBG
15-way	DDML-15M-TBG
25-way	DDML-25M-TBG
37-way	DDML-37M-TBG
50-way	DDML-50M-TBG

FEMALE

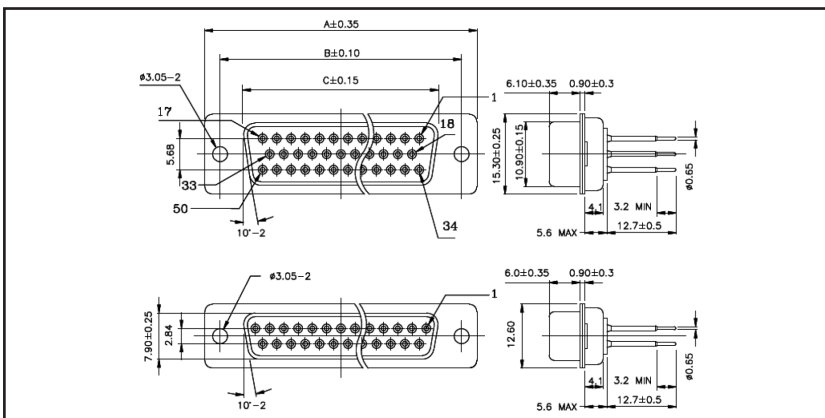

Size	A	B	C
9-way	30,8	25,00	16,30
15-way	39,2	33,32	24,65
25-way	53,0	47,04	38,40
37-way	69,3	63,50	54,80
50-way	67,0	61,00	52,20

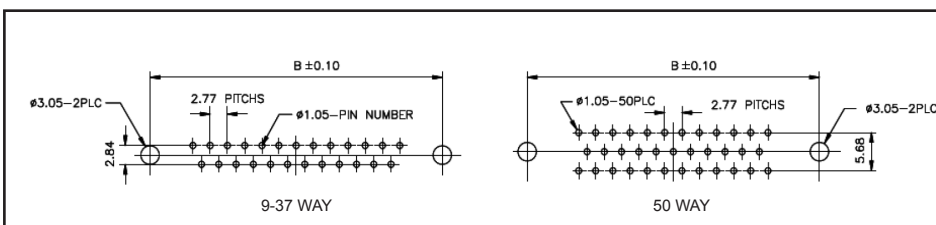

Size	Socket
9-way	DDML-09F-TBG
15-way	DDML-15F-TBG
25-way	DDML-25F-TBG
37-way	DDML-37F-TBG
50-way	DDML-50F-TBG