


STAMPED & FORMED, CRIMP, STANDARD PROFILE

TECHNICAL SPECIFICATIONS


Insulator:	Glass filled Polyester, Black UL94 V-0
Shell:	Stamped Steel, Tin Plated
Contact pins:	Copper Alloy
Contact current rating:	2 Amps max
Operating temperature:	-55°C to +105°C
Insulator resistance:	1000MΩ min

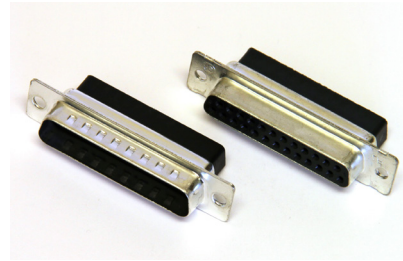

MALE

Size	Plug
9-way	DBC9SP
15-way	DBC15SP
25-way	DBC25SP
37-way	DBC37SP
50-way	DBC50SP


Size	A	B	C	D
9-way	16,92	25,00	30,8	19,2
15-way	25,25	33,30	39,2	27,7
25-way	38,96	47,10	53,1	41,1
37-way	55,42	63,50	69,4	57,3
50-way	52,81	61,00	67,0	55,1

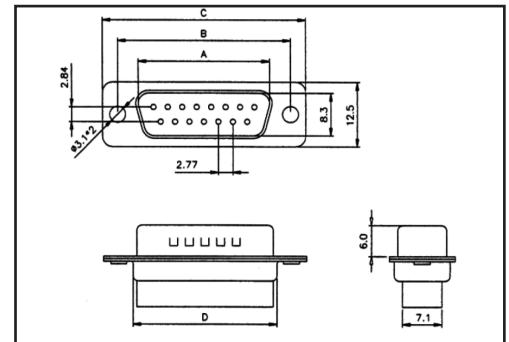

FEMALE


Size	Socket
9-way	DBC9SS
15-way	DBC15SS
25-way	DBC25SS
37-way	DBC37SS
50-way	DBC50SS

Size	A	B	C	D
9-way	16,30	25,00	30,8	19,2
15-way	24,60	33,30	39,2	27,7
25-way	38,30	47,10	53,1	41,1
37-way	54,80	63,50	69,4	57,3
50-way	52,20	61,00	67,0	55,1

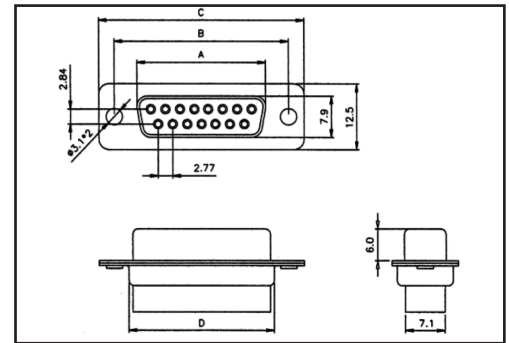


CRIMP CONTACTS

Material: Brass (Male)
Phosphor Bronze (Female)
Plating: Goldflash over Nickel
Suitable for 24-28 AWG





MALE

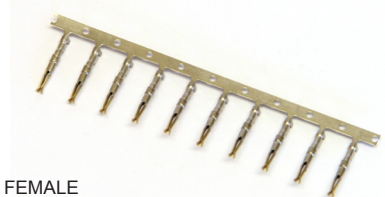

FEMALE

Gender	Product Code
Male	DBCTMR
Female	DBCTFR

AWG	A	B	C	D
24-28	2,14	2,26	1,75	1,54

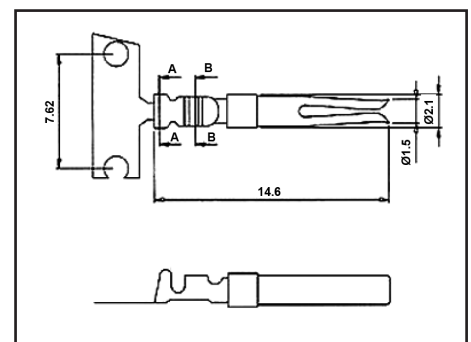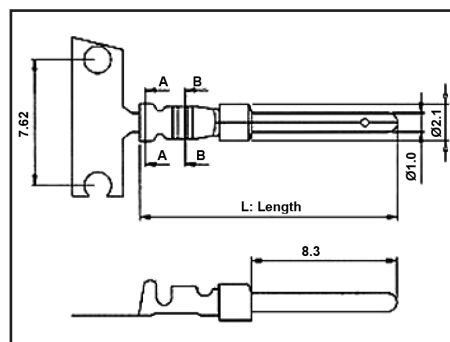

TOOLING

INSERTION/
EXTRACTION TOOL



Ratchet operated Crimp Tool
Suitable for DBCTMR and
DBCTFR Crimp Contacts



Product Code
DCT-TOOL-EX

Product Code
CT08