

IP67 WATER RESISTANT SUB D HOODS WITH SOLDER CONNECTOR


TECHNICAL SPECIFICATIONS

Connector Body:	PBT, UL-recognised
Connector Pin:	Brass, Gold Flash
Connector Shell:	Steel, Ni Plated
Operating Temperature:	-40°C to +105°C
Cable Entry:	Top
Thumbscrews:	UNC 4-40
Waterproof:	IP67



ELECTRICAL SPECIFICATIONS

Contact Resistance:	< 20mOhm
Insulation Resistance:	> 500Mohm at DC 500V
Current Rating:	5A (Standard D-Sub)
Breakdown Voltage:	> AC 500V/rms, 60Hz/1 minute

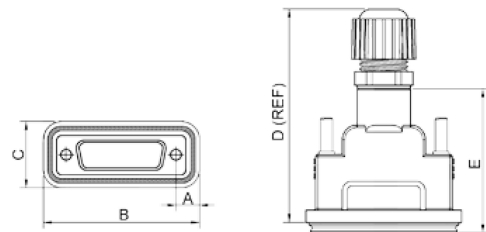

Size	Product Code-Plug	Product Code-Socket
9-way	SDB-09BMMA-SL7001	SDB-09BFFA-SL7001
15-way	SDB-15BMMA-SL7001	SDB-15BFFA-SL7001
25-way	SDB-25BMMA-SL7001	SDB-25BFFA-SL7001

Size	Dim A	Dim B	Dim C	Dim D	Dim E
9-way	8,0	39,4	21,0	39,0	32,3
15-way	8,0	50,6	21,0	43,2	32,3
25-way	8,0	64,5	21,0	55,0	32,3

IP67 WATER RESISTANT SUB D CONNECTORS, STANDARD SOLDER

TECHNICAL SPECIFICATIONS


Connector Body:	PBT, UL-recognised
Connector Pin:	Brass, Gold Flash
Connector Shell:	Steel, Ni Plated
Operating Temperature:	-40°C to +105°C
Cable Entry:	Straight or Angled
Thumbscrews:	UNC 4-40
Waterproof:	IP68



ELECTRICAL SPECIFICATIONS

Contact Resistance:	< 20mOhm
Insulation Resistance:	> 500Mohm at DC 500V
Current Rating:	5A (Standard D-Sub)
Breakdown Voltage:	> AC 500V/rms, 60Hz/1 minute

Standard D-Sub Connectors:
Solder

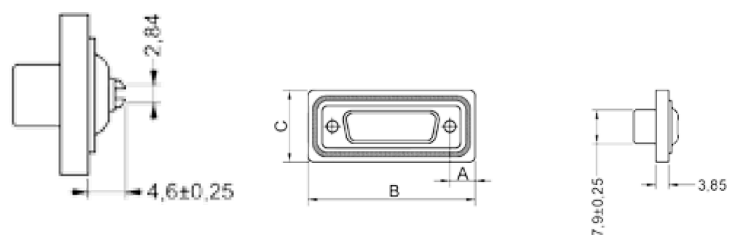

Size	Product Code-Plug	Product Code-Socket
9-way	SDB-09PMMS-SL8001	SDB-09PFFS-SL8001
15-way	SDB-15PMMS-SL8001	SDB-15PFFS-SL8001
25-way	SDB-25PMMS-SL8001	SDB-25PFFS-SL8001

Size	Dim A	Dim B	Dim C
9-way	7,2	39,4	21,0
15-way	7,2	47,7	21,0
25-way	8,5	64,0	21,0