

PCB MOUNT, BOX HEADER WITH EJECTORS 2.54mm








TECHNICAL SPECIFICATIONS

Material:	UL 94 V-0 Plastic Material
Operating Temperature:	-40°C to +105°C
Contacts:	Copper Alloy
Current rating:	2 A
Withstanding voltage:	AC 1000V
Insulator Resistance:	1000MΩ min.
Contact Resistance:	20mΩ max.



FEATURES

- Choices of Eject lever
- Fully shrouded provides ultimate reliability
- Standard in black
- Grey available on request

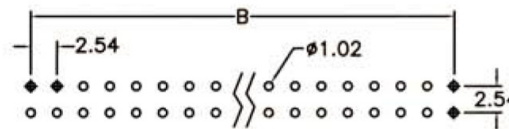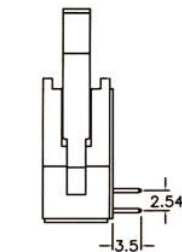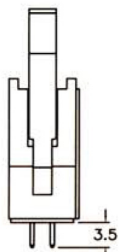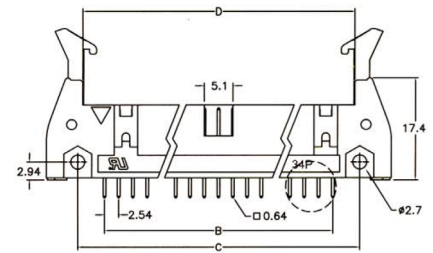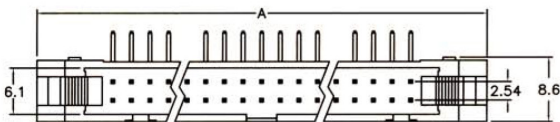

Position	Dim A	Dim B	Dim C	Dim D
10	31,88	10,16	21,84	17,96
14	36,96	15,24	26,92	23,04
16	39,50	17,78	29,46	25,58
20	44,58	22,86	34,54	30,66
26	52,20	30,48	42,16	38,28
30	57,28	35,56	47,24	43,36
34	62,36	40,64	52,32	48,44
40	69,98	48,26	59,94	56,06
50	82,68	60,96	72,64	68,76
60	95,38	73,66	85,34	81,46
64	100,46	78,74	90,42	86,54

Long Ejectors Black Straight	Long Ejectors Black Right Angle
3011-10-GOOSBIA	3011-10-GOORBIA
3011-14-GOOSBIA	3011-14-GOORBIA
3011-16-GOOSBIA	3011-16-GOORBIA
3011-20-GOOSBIA	3011-20-GOORBIA
3011-26-GOOSBIA	3011-26-GOORBIA
3011-30-GOOSBIA	3011-30-GOORBIA
3011-34-GOOSBIA	3011-34-GOORBIA
3011-40-GOOSBIA	3011-40-GOORBIA
3011-50-GOOSBIA	3011-50-GOORBIA
3011-60-GOOSBIA	3011-60-GOORBIA
3011-64-GOOSBIA	3011-64-GOORBIA