




STAMPED, PCB MOUNT RIGHT ANGLE, STANDARD PROFILE, EURO FOOTPRINT

TECHNICAL SPECIFICATIONS

Contact current rating:	2 Amps max
Contact resistance:	10mΩ max
Operating temperature:	-55°C to +105°C
Withstanding voltage:	1000V AC for 1 minute
Insulator resistance:	1000MΩ min
Shell:	Steel
Insulator:	PBT, rated UL94V-0
Contacts:	Copper Alloy



MALE

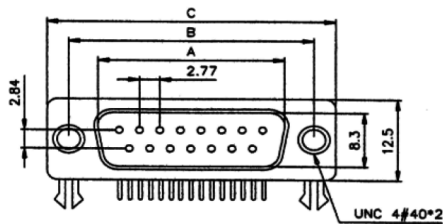




L: Footprint

Dimension

Position	A	B	C
09	16.92	25.00	30.8
15	25.25	33.30	39.2
25	38.96	47.10	53.1
37	55.42	63.50	69.4

Size	Plug
9-way	DRB-09MNBG-111
15-way	DRB-15MNBG-111
25-way	DRB-25MNBG-111
37-way	DRB-37MNBG-111
50-way	DRB-50MNBG-111

FEMALE

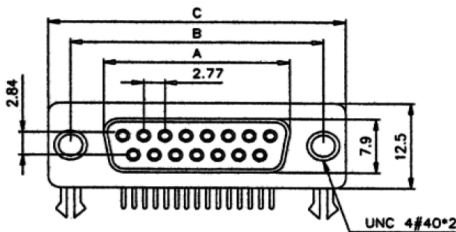


L: Footprint

Dimension

Position	A	B	C
09	16.30	25.00	30.8
15	24.60	33.30	39.2
25	38.30	47.10	53.1
37	54.80	63.50	69.4

Size	Socket
9-way	DRB-09FNBG-111
15-way	DRB-15FNBG-111
25-way	DRB-25FNBG-111
37-way	DRB-37FNBG-111
50-way	DRB-50FNBG-111

PCB LAYOUT

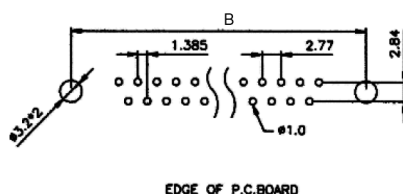

Position	B
09	25.00
15	33.30
25	47.10
37	63.50

FITTED WITH ACCESSORIES

