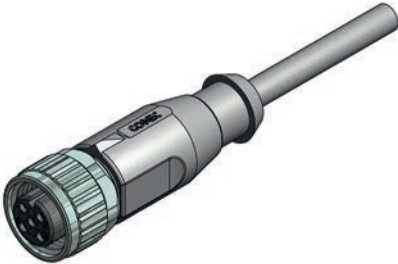



Female connector axial A-Coding

PVC, grey, LiYY



Contact assignment

	Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
	3	A	250	4	2	0,34	SAL-12-RK3-2 / A1	43-10000
					3		SAL-12-RK3-3 / A1	43-10001
					5		SAL-12-RK3-5 / A1	43-10002
					10		SAL-12-RK3-10 / A1	43-10003
	4	A	250	4	2	0,34	SAL-12-RK4-2 / A1	43-10020
					3		SAL-12-RK4-3 / A1	43-10021
					5		SAL-12-RK4-5 / A1	43-10022
					10		SAL-12-RK4-10 / A1	43-10023
	5	A	60	4	2	0,34	SAL-12-RK5-2 / A1	43-10040
					3		SAL-12-RK5-3 / A1	43-10041
					5		SAL-12-RK5-5 / A1	43-10042
					10		SAL-12-RK5-10 / A1	43-10043
	6	A	30	2	2	0,25	SAL-12-RK6-2 / A1	43-10060
					3		SAL-12-RK6-3 / A1	43-10061
					5		SAL-12-RK6-5 / A1	43-10062
					10		SAL-12-RK6-10 / A1	43-10063
	8	A	30	2	2	0,25	SAL-12-RK8-2 / A1	43-10072
					3		SAL-12-RK8-3 / A1	43-10073
					5		SAL-12-RK8-5 / A1	43-10074
					10		SAL-12-RK8-10 / A1	43-10075
	12	A	30	1,5	2	0,14	SAL-12-RK12-2 / A3	43-11264
					3		SAL-12-RK12-3 / A3	43-11265
					5		SAL-12-RK12-5 / A3	43-11266
					10		SAL-12-RK12-10 / A3	43-11267

Female connector axial A-Coding

TPU, UL, halogenfree, black, Li9Y11Y

Contact assignment

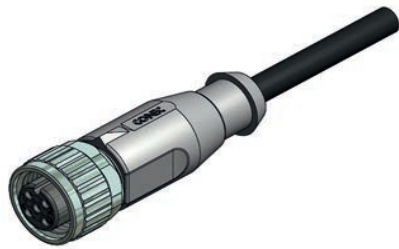

Pin 1
Pin 3
Pin 4

Number of poles
Coding
Rated voltage [V]
Current rating [A]
Cable length = L [m]
Wire cross section [mm²]

3
A
250
4

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

Pin 1
Pin 2
Pin 3
Pin 4

4
A
250
4

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

5
A
60
4

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

Pin 1
Pin 2
Pin 3

Pin 4
Pin 6
Pin 7

6
A
30
2

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

Pin 1
Pin 2
Pin 3
Pin 4

Pin 5
Pin 6
Pin 7
Pin 8

8
A
30
2

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

2
3
5
10

0,25

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5
Pin 6

Pin 7
Pin 8
Pin 9
Pin 10
Pin 11
Pin 12

12
A
30
1,5

2
3
5
10

0,14

2
3
5
10

0,14

2
3
5
10

0,14

2
3
5
10

0,14

2
3
5
10

0,14



2
3
5
10

0,14

2
3
5
10

0,14

TPU, UL, irradiated, orange Li12Y11X

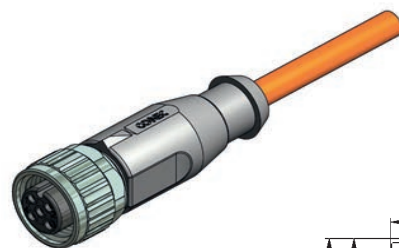

Pin 1
Pin 3
Pin 4

3
A
250
4

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

Pin 1
Pin 2
Pin 3
Pin 4

4
A
250
4

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

5
A
60
4

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34

2
3
5
10

0,34