
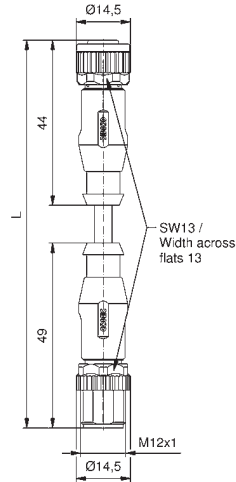


Female connector axial

Male connector axial

PVC, grey, LiYY

Contact assignment

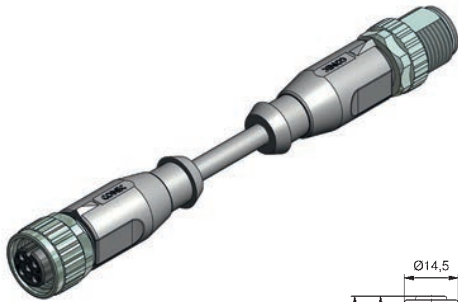

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5
Pin 6

Pin 4

Pin 5

Pin 6

Pin 7

Pin 8

Pin 9
Pin 10
Pin 11
Pin 12


Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3	A	250	4	0,3	0,34	SAL-12-RK3-RS3-0,3/A1	43-10544
				0,6		SAL-12-RK3-RS3-0,6/A1	43-10545
				1,5		SAL-12-RK3-RS3-1,5/A1	43-10546
				3		SAL-12-RK3-RS3-3/A1	43-10547
4	A	250	4	0,3	0,34	SAL-12-RK4-RS4-0,3/A1	43-10564
				0,6		SAL-12-RK4-RS4-0,6/A1	43-10565
				1,5		SAL-12-RK4-RS4-1,5/A1	43-10566
				3		SAL-12-RK4-RS4-3/A1	43-10567
5	A	60	4	0,3	0,34	SAL-12-RK5-RS5-0,3/A1	43-10584
				0,6		SAL-12-RK5-RS5-0,6/A1	43-10585
				1,5		SAL-12-RK5-RS5-1,5/A1	43-10586
				3		SAL-12-RK5-RS5-3/A1	43-10587
6	A	30	2	0,3	0,25	SAL-12-RK6-RS6-0,3/A1	43-11070
				0,6		SAL-12-RK6-RS6-0,6/A1	43-11071
				1,5		SAL-12-RK6-RS6-1,5/A1	43-11072
				3		SAL-12-RK6-RS6-3/A1	43-11073
8	A	30	2	0,3	0,25	SAL-12-RK8-RS8-0,3/A1	43-10596
				0,6		SAL-12-RK8-RS8-0,6/A1	43-10597
				1,5		SAL-12-RK8-RS8-1,5/A1	43-10598
				3		SAL-12-RK8-RS8-3/A1	43-10599
12	A	30	1,5	0,3	0,14	SAL-12-RK12-RS12-0,3/A3	43-15277
				0,6		SAL-12-RK12-RS12-0,6/A3	43-15278
				1,5		SAL-12-RK12-RS12-1,5/A3	43-15279
				3		SAL-12-RK12-RS12-3/A3	43-15280

Female connector axial
Male connector axial

TPU, UL, halogenfree, black, Li9Y11Y

Contact assignment

	Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
	3	A	250	4	0,3	0,25	SAL-12-RK3-RS3-0,3/K1	43-10556
					0,6	0,25	SAL-12-RK3-RS3-0,6/K1	43-10557
					1,5	0,25	SAL-12-RK3-RS3-1,5/K1	43-10558
					3	0,25	SAL-12-RK3-RS3-3/K1	43-10559
	4	A	250	4	0,3	0,25	SAL-12-RK4-RS4-0,3/K1	43-10576
					0,6	0,25	SAL-12-RK4-RS4-0,6/K1	43-10577
					1,5	0,25	SAL-12-RK4-RS4-1,5/K1	43-10578
					3	0,25	SAL-12-RK4-RS4-3/K1	43-10579
	5	A	60	4	0,3	0,34	SAL-12-RK5-RS5-0,3/K1	43-10672
					0,6	0,34	SAL-12-RK5-RS5-0,6/K1	43-10673
					1,5	0,34	SAL-12-RK5-RS5-1,5/K1	43-10674
					3	0,34	SAL-12-RK5-RS5-3/K1	43-10675
	6	A	30	2	0,3	0,25	SAL-12-RK6-RS6-0,3/K1	43-11078
					0,6	0,25	SAL-12-RK6-RS6-0,6/K1	43-11079
					1,5	0,25	SAL-12-RK6-RS6-1,5/K1	43-11080
					3	0,25	SAL-12-RK6-RS6-3/K1	43-11081
	8	A	30	2	0,3	0,25	SAL-12-RK8-RS8-0,3/K1	43-11054
					0,6	0,25	SAL-12-RK8-RS8-0,6/K1	43-11055
					1,5	0,25	SAL-12-RK8-RS8-1,5/K1	43-11056
					3	0,25	SAL-12-RK8-RS8-3/K1	43-11057
	12	A	30	1,5	0,3	0,14	SAL-12-RK12-RS12-0,3/K1	43-13662
					0,6	0,14	SAL-12-RK12-RS12-0,6/K1	43-15281
					1,5	0,14	SAL-12-RK12-RS12-1,5/K1	43-15282
					3	0,14	SAL-12-RK12-RS12-3/K1	43-15283

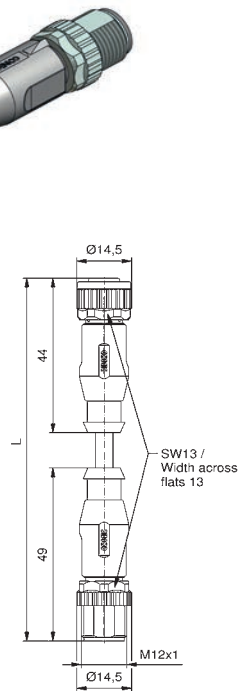

TPU, UL, irradiated, orange, Li12Y11X

	3	A	250	4	0,3	0,34	SAL-12-RK3-RS3-0,3/J1	43-10560
					0,6	0,34	SAL-12-RK3-RS3-0,6/J1	43-10561
					1,5	0,34	SAL-12-RK3-RS3-1,5/J1	43-10562
					3	0,34	SAL-12-RK3-RS3-3/J1	43-10563
	4	A	250	4	0,3	0,34	SAL-12-RK4-RS4-0,3/J1	43-10580
					0,6	0,34	SAL-12-RK4-RS4-0,6/J1	43-10581
					1,5	0,34	SAL-12-RK4-RS4-1,5/J1	43-10582
					3	0,34	SAL-12-RK4-RS4-3/J1	43-10583
	5	A	60	4	0,3	0,34	SAL-12-RK5-RS5-0,3/J1	43-10676
					0,6	0,34	SAL-12-RK5-RS5-0,6/J1	43-10677
					1,5	0,34	SAL-12-RK5-RS5-1,5/J1	43-10678
					3	0,34	SAL-12-RK5-RS5-3/J1	43-10679

