


Female connector axial, screwable

PVC, grey, LiYY

Contact assignment

	Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
 Pin 1  Pin 3  Pin 4 	3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RK3-2 / A1	42-10000
							SAL-8-RK3-3 / A1	42-10001
							SAL-8-RK3-5 / A1	42-10002
							SAL-8-RK3-10 / A1	42-10003
 Pin 1  Pin 2  Pin 3  Pin 4 	4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RK4-2 / A1	42-10032
							SAL-8-RK4-3 / A1	42-10033
							SAL-8-RK4-5 / A1	42-10034
							SAL-8-RK4-10 / A1	42-10035
 Pin 1  Pin 2  Pin 3  Pin 4  Pin 5 	5	B	30	3	2	0,25	SAL-8B-RK5.1-2 / A1	42-11104
							SAL-8B-RK5.1-3 / A1	42-11105
							SAL-8B-RK5.1-5 / A1	42-11106
							SAL-8B-RK5.1-10 / A1	42-11107
 Pin 1  Pin 2  Pin 3  Pin 4  Pin 5  Pin 6  Pin 7  Pin 8 	8	A	30	1,5	2	0,14	SAL-8-RK8-2 / A1	42-11226
							SAL-8-RK8-3 / A1	42-11227
							SAL-8-RK8-5 / A1	42-11228
							SAL-8-RK8-10 / A1	42-11229

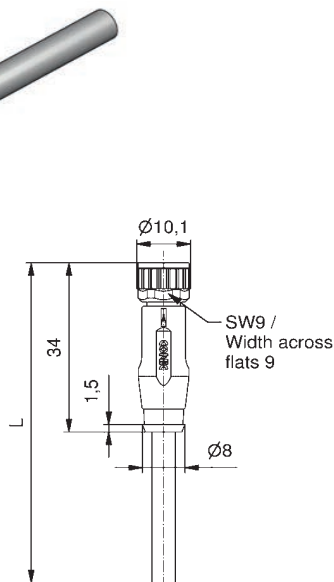

TPU, UL, halogenfree, black, Li9Y11Y

 Pin 1  Pin 3  Pin 4 	3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RK3-2 / K1	42-10004
							SAL-8-RK3-3 / K1	42-10005
							SAL-8-RK3-5 / K1	42-10006
							SAL-8-RK3-10 / K1	42-10007
 Pin 1  Pin 2  Pin 3  Pin 4 	4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RK4-2 / K1	42-10036
							SAL-8-RK4-3 / K1	42-10037
							SAL-8-RK4-5 / K1	42-10038
							SAL-8-RK4-10 / K1	42-10039
 Pin 1  Pin 2  Pin 3  Pin 4  Pin 5 	5	B	30	3	2	0,25	SAL-8B-RK5.1-2 / K1	42-11096
							SAL-8B-RK5.1-3 / K1	42-11097
							SAL-8B-RK5.1-5 / K1	42-11098
							SAL-8B-RK5.1-10 / K1	42-11099
 Pin 1  Pin 2  Pin 3  Pin 4  Pin 5 	5	B	30	3x1,5 2x3	2	3x0,14 2x0,34	SAL-8B-RK5.1-2 / H5	42-13031
							SAL-8B-RK5.1-3 / H5	42-13032
							SAL-8B-RK5.1-5 / H5	42-13033
							SAL-8B-RK5.1-10 / H5	42-13034
 Pin 1  Pin 2  Pin 3  Pin 4  Pin 5  Pin 6  Pin 7  Pin 8 	8	A	30	1,5	2	0,14	SAL-8-RK8-2 / K1	42-11175
							SAL-8-RK8-3 / K1	42-11176
							SAL-8-RK8-5 / K1	42-11177
							SAL-8-RK8-10 / K1	42-11178

