


Female connector axial, snap-in

PVC, grey, LiYY


Contact assignment

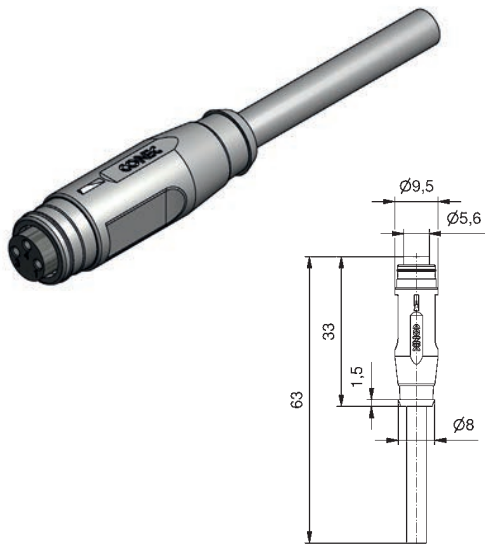

Pin 1 ■
Pin 3 ■
Pin 4 ■

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKS3-2 / A1	42-10064
				3		SAL-8-RKS3-3 / A1	42-10065
				5		SAL-8-RKS3-5 / A1	42-10066
				10		SAL-8-RKS3-10 / A1	42-10067
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKS4-2 / A1	42-10096
				3		SAL-8-RKS4-3 / A1	42-10097
				5		SAL-8-RKS4-5 / A1	42-10098
				10		SAL-8-RKS4-10 / A1	42-10099
5	B	30	3	2	0,25	SAL-8B-RKS5.1-2 / A1	42-11108
				3		SAL-8B-RKS5.1-3 / A1	42-11109
				5		SAL-8B-RKS5.1-5 / A1	42-11110
				10		SAL-8B-RKS5.1-10 / A1	42-11111

TPU, UL, halogenfree, black, Li9Y11Y

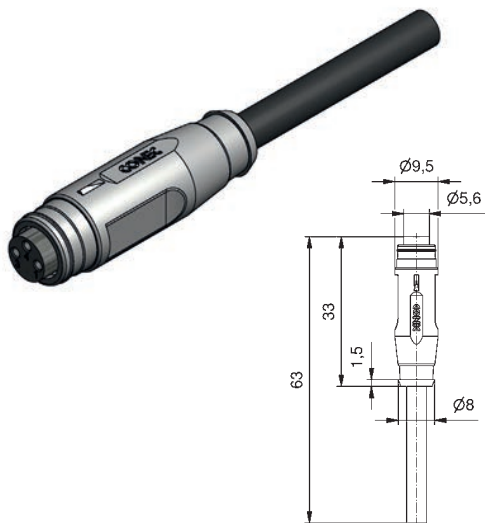

Pin 1 ■
Pin 3 ■
Pin 4 ■

3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKS3-2 / K1	42-10068
				3		SAL-8-RKS3-3 / K1	42-10069
				5		SAL-8-RKS3-5 / K1	42-10070
				10		SAL-8-RKS3-10 / K1	42-10071
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKS4-2 / K1	42-10100
				3		SAL-8-RKS4-3 / K1	42-10101
				5		SAL-8-RKS4-5 / K1	42-10102
				10		SAL-8-RKS4-10 / K1	42-10103
5	B	30	3	2	0,25	SAL-8B-RKS5.1-2 / K1	42-11100
				3		SAL-8B-RKS5.1-3 / K1	42-11101
				5		SAL-8B-RKS5.1-5 / K1	42-11102
				10		SAL-8B-RKS5.1-10 / K1	42-11103