


Female connector axial, snap-in,
wire cross section 0.5mm²sq

PVC, grey, LiYY

Contact assignment

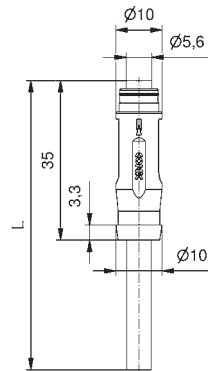


Pin 1 ■
Pin 3 ■
Pin 4 ■

Pin 1 ■
Pin 2 ■
Pin 3 ■
Pin 4 ■

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm ²]	Description	Part No.
3		50 V AC / 60 V DC	5	2	0,5	SAL-8-RKS3-2 / A1 / 05	42-13043
				3		SAL-8-RKS3-3 / A1 / 05	42-13044
				5		SAL-8-RKS3-5 / A1 / 05	42-13045
				10		SAL-8-RKS3-10 / A1 / 05	42-13046
4		50 V AC / 60 V DC	5	2	0,5	SAL-8-RKS4-2 / A1 / 05	42-13051
				3		SAL-8-RKS4-3 / A1 / 05	42-13052
				5		SAL-8-RKS4-5 / A1 / 05	42-13053
				10		SAL-8-RKS4-10 / A1 / 05	42-13054

TPU, UL, halogenfree, black, Li9Y11Y

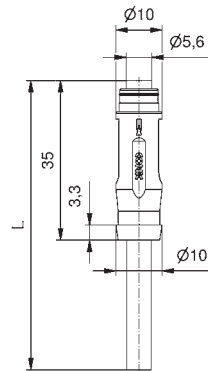

Pin 1 ■
Pin 3 ■
Pin 4 ■

Pin 1 ■
Pin 2 ■
Pin 3 ■
Pin 4 ■

3		50 V AC / 60 V DC	5	2	0,5	SAL-8-RKS3-2 / K1 / 05	42-13047
				3		SAL-8-RKS3-3 / K1 / 05	42-13048
				5		SAL-8-RKS3-5 / K1 / 05	42-13049
				10		SAL-8-RKS3-10 / K1 / 05	42-13050
4		50 V AC / 60 V DC	5	2	0,5	SAL-8-RKS4-2 / K1 / 05	42-13055
				3		SAL-8-RKS4-3 / K1 / 05	42-13056
				5		SAL-8-RKS4-5 / K1 / 05	42-13057
				10		SAL-8-RKS4-10 / K1 / 05	42-13058