


Female connector angled, snap-in

PVC, grey, LiYY

Contact assignment

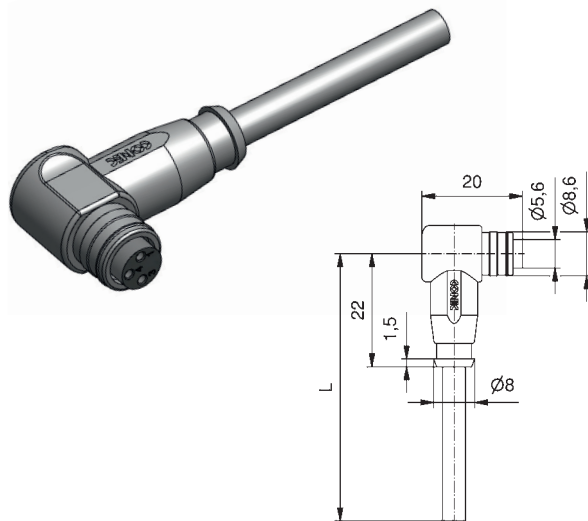


Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKWS3-2 / A1	42-10080
				3		SAL-8-RKWS3-3 / A1	42-10081
				5		SAL-8-RKWS3-5 / A1	42-10082
				10		SAL-8-RKWS3-10 / A1	42-10083
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKWS4-2 / A1	42-10112
				3		SAL-8-RKWS4-3 / A1	42-10113
				5		SAL-8-RKWS4-5 / A1	42-10114
				10		SAL-8-RKWS4-10 / A1	42-10115

TPU, UL, halogenfree, black, Li9Y11Y

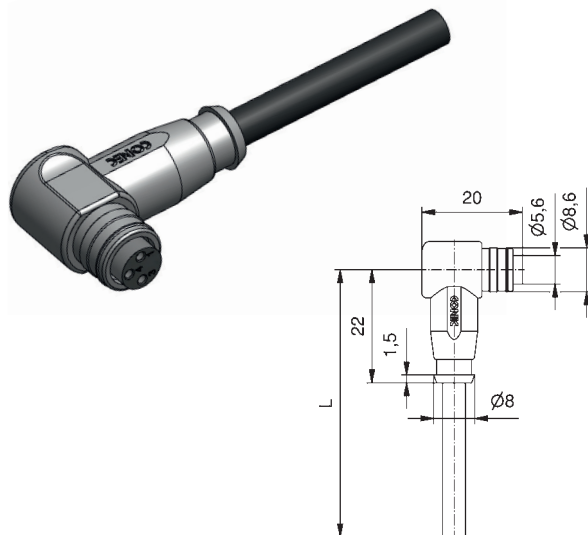

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKWS3-2 / K1	42-10084
				3		SAL-8-RKWS3-3 / K1	42-10085
				5		SAL-8-RKWS3-5 / K1	42-10086
				10		SAL-8-RKWS3-10 / K1	42-10087
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RKWS4-2 / K1	42-10116
				3		SAL-8-RKWS4-3 / K1	42-10117
				5		SAL-8-RKWS4-5 / K1	42-10118
				10		SAL-8-RKWS4-10 / K1	42-10119