

Male connector axial, screwable

PVC, grey, LiYY

Contact assignment

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RS3-2 / A1	42-10008
				3		SAL-8-RS3-3 / A1	42-10009
				5		SAL-8-RS3-5 / A1	42-10010
				10		SAL-8-RS3-10 / A1	42-10011
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RS4-2 / A1	42-10040
				3		SAL-8-RS4-3 / A1	42-10041
				5		SAL-8-RS4-5 / A1	42-10042
				10		SAL-8-RS4-10 / A1	42-10043
5	B	30	3	2	0,25	SAL-8B-RS5.1-2 / A1	42-11120
				3		SAL-8B-RS5.1-3 / A1	42-11121
				5		SAL-8B-RS5.1-5 / A1	42-11122
				10		SAL-8B-RS5.1-10 / A1	42-11123
8	A	30	1,5	2	0,14	SAL-8-RS8-2 / A1	42-11230
				3		SAL-8-RS8-3 / A1	42-11231
				5		SAL-8-RS8-5 / A1	42-11232
				10		SAL-8-RS8-10 / A1	42-11233


Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3
Pin 4

Pin 5
Pin 6
Pin 7
Pin 8

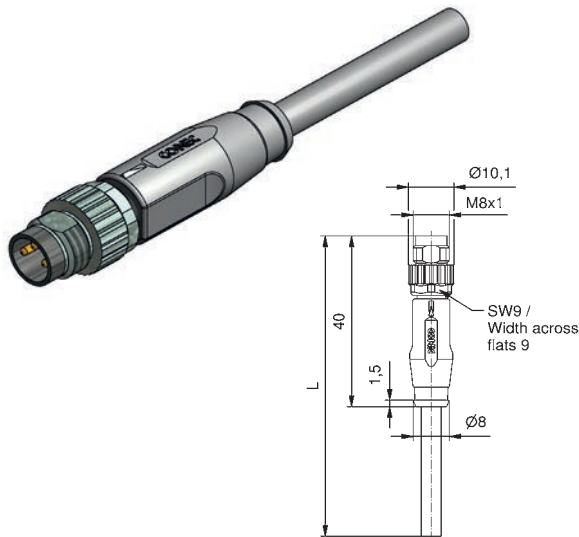

TPU, UL, halogenfree, black, Li9Y11Y

3		50 V AC / 60 V DC	3	2	0,25	SAL-8-RS3-2 / K1	42-10012
				3		SAL-8-RS3-3 / K1	42-10013
				5		SAL-8-RS3-5 / K1	42-10014
				10		SAL-8-RS3-10 / K1	42-10015
4		50 V AC / 60 V DC	3	2	0,25	SAL-8-RS4-2 / K1	42-10044
				3		SAL-8-RS4-3 / K1	42-10045
				5		SAL-8-RS4-5 / K1	42-10046
				10		SAL-8-RS4-10 / K1	42-10047
5	B	30	3	2	0,25	SAL-8B-RS5.1-2 / K1	42-11112
				3		SAL-8B-RS5.1-3 / K1	42-11113
				5		SAL-8B-RS5.1-5 / K1	42-11114
				10		SAL-8B-RS5.1-10 / K1	42-11115
5	B	30	3x1,5 2x3	2	3x0,14 2x0,34	SAL-8B-RS5.1-2 / H5	42-13035
				3		SAL-8B-RS5.1-3 / H5	42-13036
				5		SAL-8B-RS5.1-5 / H5	42-13037
				10		SAL-8B-RS5.1-10 / H5	42-13038
8	A	30	1,5	2	0,14	SAL-8-RS8-2 / K1	42-11179
				3		SAL-8-RS8-3 / K1	42-11180
				5		SAL-8-RS8-5 / K1	42-11181
				10		SAL-8-RS8-10 / K1	42-11182

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3
Pin 4
Pin 5

Pin 1
Pin 2
Pin 3
Pin 4

Pin 5
Pin 6
Pin 7
Pin 8

