


Male connector axial, screwable,
wire cross section 0.5mm²

PVC, grey, LiYY

Contact assignment

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm ²]	Description	Part No.
3	50 V AC / 60 V DC	5	0,5	2	0,5	SAL-8-RS3-2 / A1 / 05	42-12234
				3		SAL-8-RS3-3 / A1 / 05	42-12235
				5		SAL-8-RS3-5 / A1 / 05	42-12236
				10		SAL-8-RS3-10 / A1 / 05	42-12237
4	50 V AC / 60 V DC	5	0,5	2	0,5	SAL-8-RS4-2 / A1 / 05	42-12274
				3		SAL-8-RS4-3 / A1 / 05	42-12275
				5		SAL-8-RS4-5 / A1 / 05	42-12276
				10		SAL-8-RS4-10 / A1 / 05	42-12277

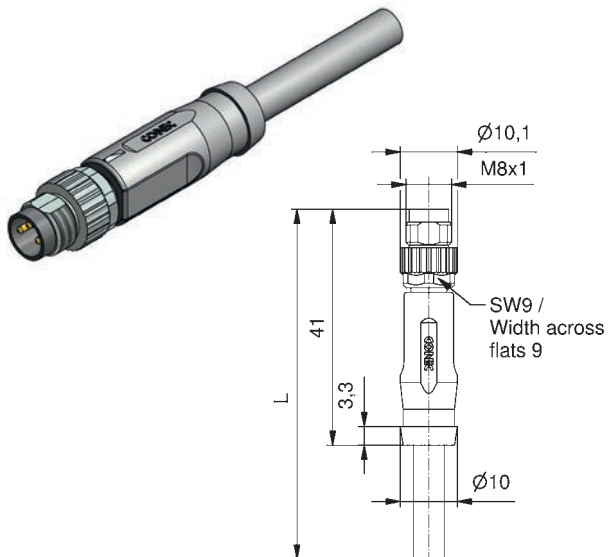


Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

TPU, UL, halogenfree, black, Li9Y11Y

3	50 V AC / 60 V DC	5	0,5	2	0,5	SAL-8-RS3-2 / K1 / 05	42-12238
				3		SAL-8-RS3-3 / K1 / 05	42-12239
				5		SAL-8-RS3-5 / K1 / 05	42-12240
				10		SAL-8-RS3-10 / K1 / 05	42-12241
4	50 V AC / 60 V DC	5	0,5	2	0,5	SAL-8-RS4-2 / K1 / 05	42-12278
				3		SAL-8-RS4-3 / K1 / 05	42-12279
				5		SAL-8-RS4-5 / K1 / 05	42-12280
				10		SAL-8-RS4-10 / K1 / 05	42-12281

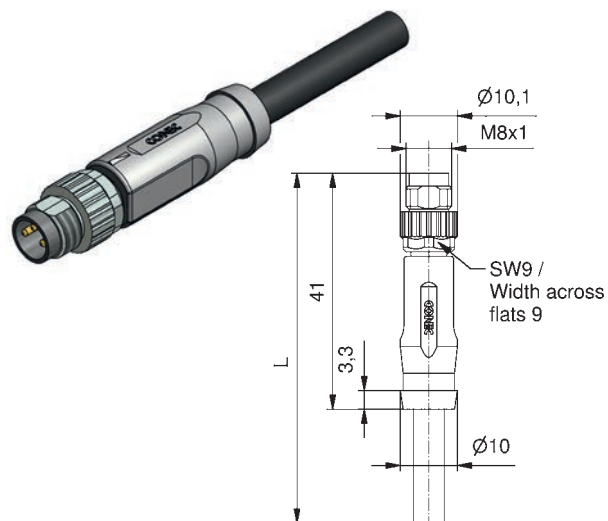

Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4