


Male connector axial, screwable / snap-in with fixed thread

PVC, grey, LiYY

Contact assignment

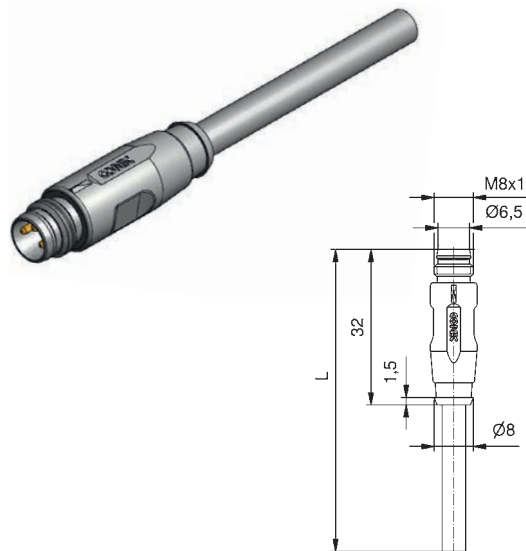


Pin 1 ■
Pin 3 ■
Pin 4 ■

Pin 1 ■
Pin 2 ■
Pin 3 ■
Pin 4 ■

Pin 1 ■
Pin 2 ■
Pin 3 ■
Pin 4 ■
Pin 5 ■

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3		50 V AC / 60 V DC	3	0,5	0,25	SAL-8-RSFU3-0,5 / A1	42-11187
				1		SAL-8-RSFU3-1 / A1	42-11188
				2		SAL-8-RSFU3-2 / A1	42-11189
				3		SAL-8-RSFU3-3 / A1	42-11190
4		50 V AC / 60 V DC	3	0,5	0,25	SAL-8-RSFU4-0,5 / A1	42-11195
				1		SAL-8-RSFU4-1 / A1	42-11196
				2		SAL-8-RSFU4-2 / A1	42-11197
				3		SAL-8-RSFU4-3 / A1	42-11198
5	B	30	3	0,5	0,25	SAL-8B-RSFU5.1-0,5 / A1	42-12173
				1		SAL-8B-RSFU5.1-1 / A1	42-12174
				2		SAL-8B-RSFU5.1-2 / A1	42-12175
				3		SAL-8B-RSFU5.1-3 / A1	42-12176

TPU, UL, halogenfree, black, Li9Y11Y

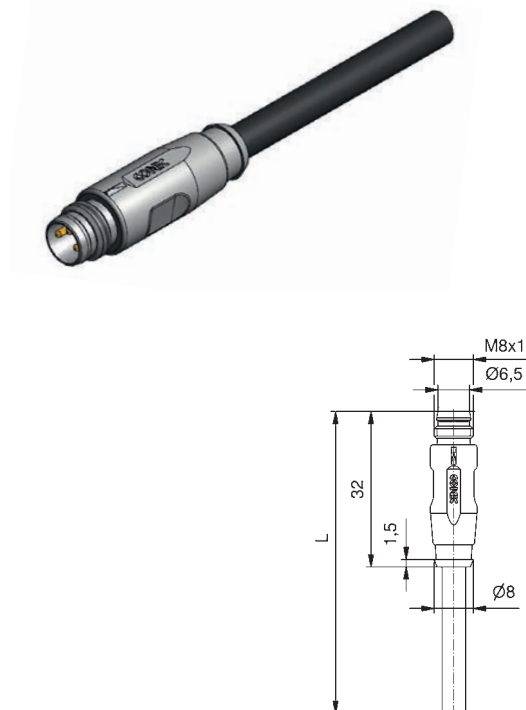

Pin 1 ■
Pin 3 ■
Pin 4 ■

Pin 1 ■
Pin 2 ■
Pin 3 ■
Pin 4 ■

Pin 1 ■
Pin 2 ■
Pin 3 ■
Pin 4 ■
Pin 5 ■

Pin 1 ■
Pin 2 ■
Pin 3 ■
Pin 4 ■
Pin 5 ■

3		50 V AC / 60 V DC	3	0,5	0,25	SAL-8-RSFU3-0,5 / K1	42-11191
				1		SAL-8-RSFU3-1 / K1	42-11192
				2		SAL-8-RSFU3-2 / K1	42-11193
				3		SAL-8-RSFU3-3 / K1	42-11194
4		50 V AC / 60 V DC	3	0,5	0,25	SAL-8-RSFU4-0,5 / K1	42-11199
				1		SAL-8-RSFU4-1 / K1	42-11200
				2		SAL-8-RSFU4-2 / K1	42-11201
				3		SAL-8-RSFU4-3 / K1	42-11202
5	B	30	3	0,5	0,25	SAL-8B-RSFU5.1-0,5 / K1	42-12177
				1		SAL-8B-RSFU5.1-1 / K1	42-12178
				2		SAL-8B-RSFU5.1-2 / K1	42-12179
				3		SAL-8B-RSFU5.1-3 / K1	42-12180
5	B	30	3x1,5 2x3	0,5	3x0,14 2x0,34	SAL-8B-RSFU5.1-0,5 / H5	42-12181
				1		SAL-8B-RSFU5.1-1 / H5	42-12182
				2		SAL-8B-RSFU5.1-2 / H5	42-12183
				3		SAL-8B-RSFU5.1-3 / H5	42-12184