


Female connector axial, screwable
Male connector axial, snap-in

PVC, grey, LiYY

Contact assignment

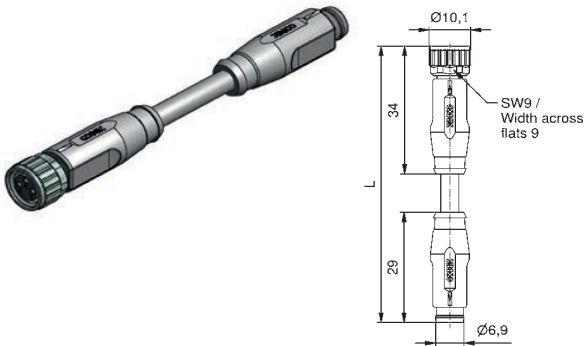


Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3	50 V AC / 60 V DC	3	0,3	0,25		SAL-8-RK3-RSS3-0,3 / A1	42-10827
			0,6			SAL-8-RK3-RSS3-0,6 / A1	42-10828
			1,5			SAL-8-RK3-RSS3-1,5 / A1	42-10829
			3			SAL-8-RK3-RSS3-3 / A1	42-10830
4	50 V AC / 60 V DC	3	0,3	0,25		SAL-8-RK4-RSS4-0,3 / A1	42-10835
			0,6			SAL-8-RK4-RSS4-0,6 / A1	42-10836
			1,5			SAL-8-RK4-RSS4-1,5 / A1	42-10837
			3			SAL-8-RK4-RSS4-3 / A1	42-10838

TPU, UL, halogenfree, black, Li9Y11Y

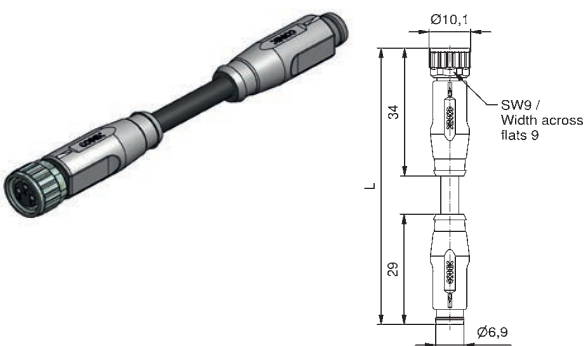


Pin 1
Pin 3
Pin 4

Pin 1
Pin 2
Pin 3
Pin 4

3	50 V AC / 60 V DC	3	0,3	0,25		SAL-8-RK3-RSS3-0,3 / K1	42-10831
			0,6			SAL-8-RK3-RSS3-0,6 / K1	42-10832
			1,5			SAL-8-RK3-RSS3-1,5 / K1	42-10833
			3			SAL-8-RK3-RSS3-3 / K1	42-10834
4	50 V AC / 60 V DC	3	0,3	0,25		SAL-8-RK4-RSS4-0,3 / K1	42-10839
			0,6			SAL-8-RK4-RSS4-0,6 / K1	42-10840
			1,5			SAL-8-RK4-RSS4-1,5 / K1	42-10841
			3			SAL-8-RK4-RSS4-3 / K1	42-10842

Female connector axial, screwable
Male connector axial, screwable/snap-in, thread fixed


PVC, grey, LiYY

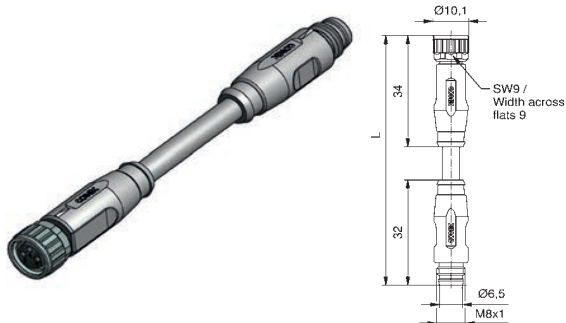

Pin 1
Pin 3
Pin 4

3	50 V AC / 60 V DC	3	0,3	0,25		SAL-8-RK3-RSFU3-0,3 / A1	42-11203
			0,6			SAL-8-RK3-RSFU3-0,6 / A1	42-11204
			1,5			SAL-8-RK3-RSFU3-1,5 / A1	42-11205
			3			SAL-8-RK3-RSFU3-3 / A1	42-11206

TPU, UL, halogenfree, black, Li9Y11Y

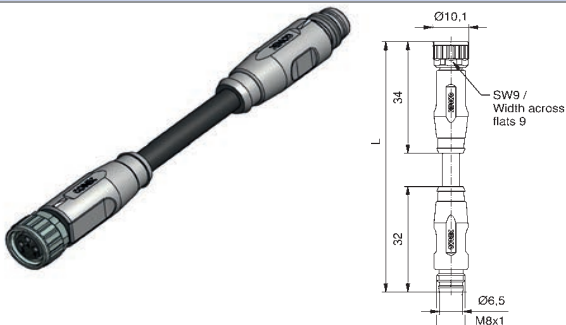

Pin 1
Pin 3
Pin 4

3	50 V AC / 60 V DC	3	0,3	0,25		SAL-8-RK3-RSFU3-0,3 / K1	42-11207
			0,6			SAL-8-RK3-RSFU3-0,6 / K1	42-11208
			1,5			SAL-8-RK3-RSFU3-1,5 / K1	42-11209
			3			SAL-8-RK3-RSFU3-3 / K1	42-11210