


Female connector axial, snap-in
Male connector axial, snap-in

PVC, grey, LiYY

Contact assignment

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Cable length = L [m]	Wire cross section [mm²]	Description	Part No.
3	Pin 1  Pin 3  Pin 4 	50 V AC / 60 V DC	5	0,5	0,3	SAL-8-RKS3-RSS3-0,3/A1/05	42-13075
					0,6	SAL-8-RKS3-RSS3-0,6/A1/05	42-13076
					1,5	SAL-8-RKS3-RSS3-1,5/A1/05	42-13077
					3	SAL-8-RKS3-RSS3-3/A1/05	42-13078
4	Pin 1  Pin 2  Pin 3  Pin 4 	50 V AC / 60 V DC	5	0,5	0,3	SAL-8-RKS4-RSS4-0,3/A1/05	42-13083
					0,6	SAL-8-RKS4-RSS4-0,6/A1/05	42-13084
					1,5	SAL-8-RKS4-RSS4-1,5/A1/05	42-13085
					3	SAL-8-RKS4-RSS4-3/A1/05	42-13086

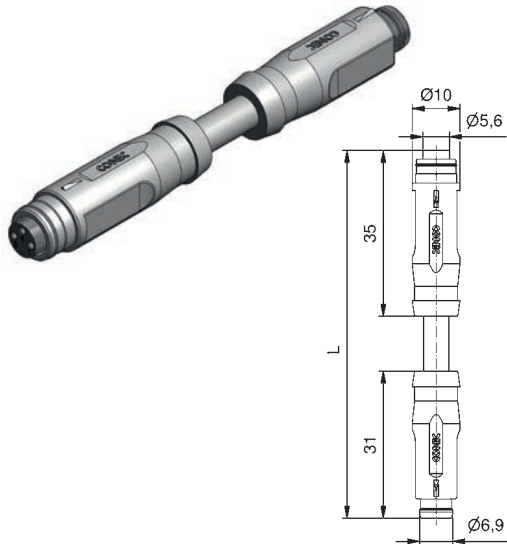

TPU, UL, halogenfree, black, Li9Y11Y

Pin 1 
 Pin 3 
 Pin 4 

Pin 1 
 Pin 2 
 Pin 3 
 Pin 4 

3	Pin 1  Pin 3  Pin 4 	50 V AC / 60 V DC	5	0,5	0,3	SAL-8-RKS3-RSS3-0,3/K1/05	42-13079
					0,6	SAL-8-RKS3-RSS3-0,6/K1/05	42-13080
					1,5	SAL-8-RKS3-RSS3-1,5/K1/05	42-13081
					3	SAL-8-RKS3-RSS3-3/K1/05	42-13082
4	Pin 1  Pin 2  Pin 3  Pin 4 	50 V AC / 60 V DC	5	0,5	0,3	SAL-8-RKS4-RSS4-0,3/K1/05	42-13339
					0,6	SAL-8-RKS4-RSS4-0,6/K1/05	42-13340
					1,5	SAL-8-RKS4-RSS4-1,5/K1/05	42-13341
					3	SAL-8-RKS4-RSS4-3/K1/05	42-13342

