



#### Male connector axial, screwable with 360deg shielding



PVC, UL, grey, LiYCY

Contact assignment

| Number of poles | Coding | Rated voltage [V] | Current rating [A] | Cable length = L [m] | Wire cross section [mm²] | Description        | Part No. |
|-----------------|--------|-------------------|--------------------|----------------------|--------------------------|--------------------|----------|
| 3               | 60     | 3                 | 0,25               | 2                    | 0,25                     | SAL-8S-RS3-2 / G3  | 42-10859 |
|                 |        |                   |                    | 3                    |                          | SAL-8S-RS3-3 / G3  | 42-10860 |
|                 |        |                   |                    | 5                    |                          | SAL-8S-RS3-5 / G3  | 42-10861 |
|                 |        |                   |                    | 10                   |                          | SAL-8S-RS3-10 / G3 | 42-10862 |
| 4               | 30     | 3                 | 0,25               | 2                    | 0,25                     | SAL-8S-RS4-2 / G3  | 42-10867 |
|                 |        |                   |                    | 3                    |                          | SAL-8S-RS4-3 / G3  | 42-10868 |
|                 |        |                   |                    | 5                    |                          | SAL-8S-RS4-5 / G3  | 42-10869 |
|                 |        |                   |                    | 10                   |                          | SAL-8S-RS4-10 / G3 | 42-10870 |
| 8               | A      | 30                | 1,5                | 2                    | 0,14                     | SAL-8S-RS8-2 / G3  | 42-12198 |
|                 |        |                   |                    | 3                    |                          | SAL-8S-RS8-3 / G3  | 42-12199 |
|                 |        |                   |                    | 5                    |                          | SAL-8S-RS8-5 / G3  | 42-12200 |
|                 |        |                   |                    | 10                   |                          | SAL-8S-RS8-10 / G3 | 42-12201 |

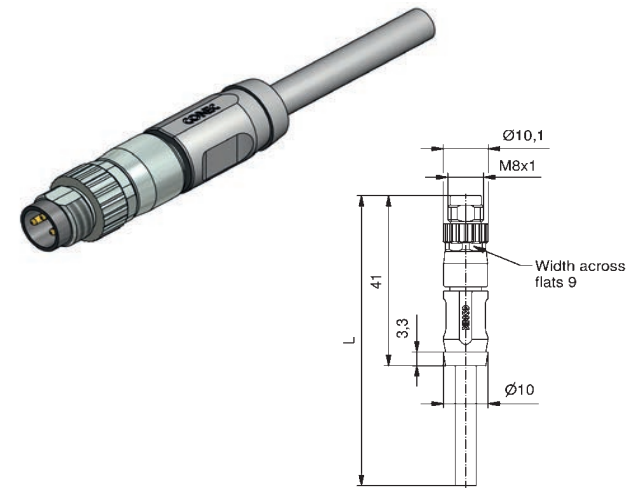


TPU, UL, halogenfree, black, Li9YC11Y

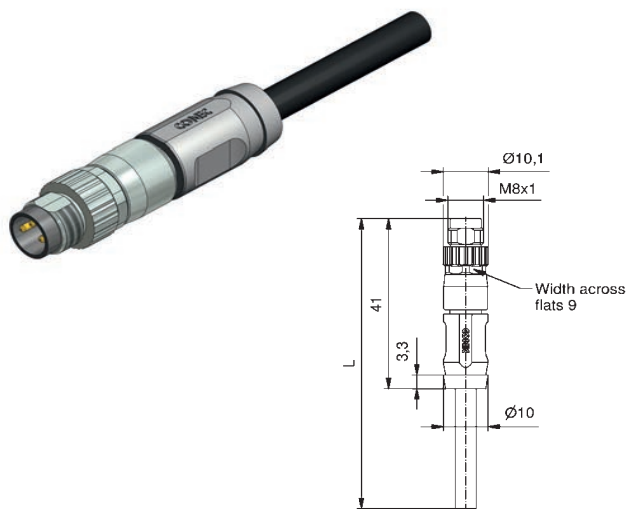

|   |    |    |      |    |      |                    |          |
|---|----|----|------|----|------|--------------------|----------|
| 3 | 60 | 3  | 0,25 | 2  | 0,25 | SAL-8S-RS3-2 / G2  | 42-10863 |
|   |    |    |      | 3  |      | SAL-8S-RS3-3 / G2  | 42-10864 |
|   |    |    |      | 5  |      | SAL-8S-RS3-5 / G2  | 42-10865 |
|   |    |    |      | 10 |      | SAL-8S-RS3-10 / G2 | 42-10866 |
| 4 | 30 | 3  | 0,25 | 2  | 0,25 | SAL-8S-RS4-2 / G2  | 42-10871 |
|   |    |    |      | 3  |      | SAL-8S-RS4-3 / G2  | 42-10872 |
|   |    |    |      | 5  |      | SAL-8S-RS4-5 / G2  | 42-10873 |
|   |    |    |      | 10 |      | SAL-8S-RS4-10 / G2 | 42-10874 |
| 8 | A  | 30 | 1,5  | 2  | 0,14 | SAL-8S-RS8-2 / G2  | 42-12194 |
|   |    |    |      | 3  |      | SAL-8S-RS8-3 / G2  | 42-12195 |
|   |    |    |      | 5  |      | SAL-8S-RS8-5 / G2  | 42-12196 |
|   |    |    |      | 10 |      | SAL-8S-RS8-10 / G2 | 42-12197 |

#### Male connector angled

TPU, UL, halogenfree, black, Li9YC11Y

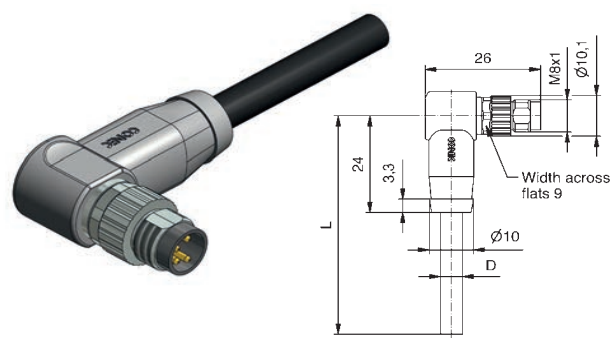

|   |    |   |      |    |      |                     |          |
|---|----|---|------|----|------|---------------------|----------|
| 4 | 30 | 3 | 0,25 | 2  | 0,25 | SAL-8S-RSW4-2 / G2  | 42-12417 |
|   |    |   |      | 3  |      | SAL-8S-RSW4-3 / G2  | 42-12418 |
|   |    |   |      | 5  |      | SAL-8S-RSW4-5 / G2  | 42-12419 |
|   |    |   |      | 10 |      | SAL-8S-RSW4-10 / G2 | 42-12420 |