


FIELD ATTACHABLE CONNECTORS M8 x 1


Screw termination

Female connector axial, screw termination

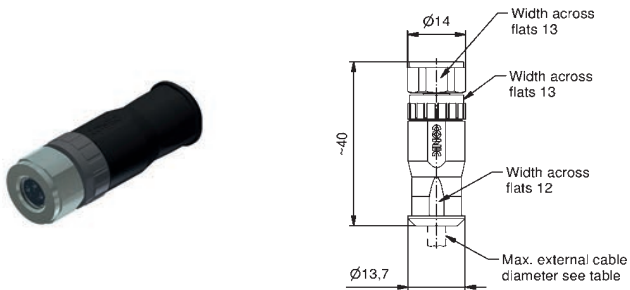

Number of poles	Coding	Rated voltage [V]	Current rating [A]	Outer ø cable [mm]	Wire cross section min-max [mm²]	Description	Part No.
3		50 V AC / 60 V DC	4	4-5,5	0,14 - 0,5	SAL-8-RKC3-S5,5	42-00010
4		50 V AC / 60 V DC	4	4-5,5	0,14 - 0,5	SAL-8-RKC4-S5,5	42-00012


Female connector angled, screw termination

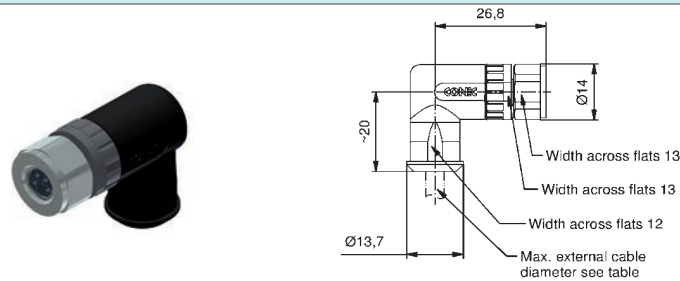

3		50 V AC / 60 V DC	4	4-5,5	0,14 - 0,5	SAL-8-RKWC3-S5,5	42-00026
4		50 V AC / 60 V DC	4	4-5,5	0,14 - 0,5	SAL-8-RKWC4-S5,5	42-00028

Clamp termination


Female connector axial, clamp termination

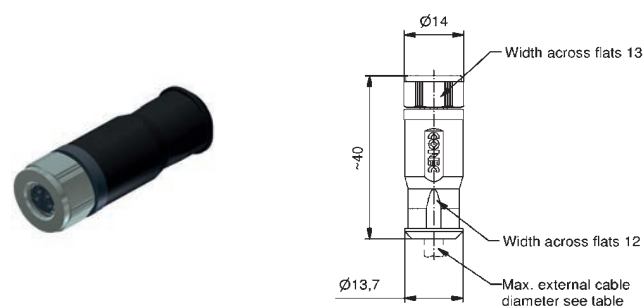

3		50 V AC / 60 V DC	3	4-5,5	0,14 - 0,34	SAL-8-RKC3-K5,5	42-00002
4		50 V AC / 60 V DC	3	4-5,5	0,14 - 0,34	SAL-8-RKC4-K5,5	42-00004

Solder termination

Female connector axial, solder termination

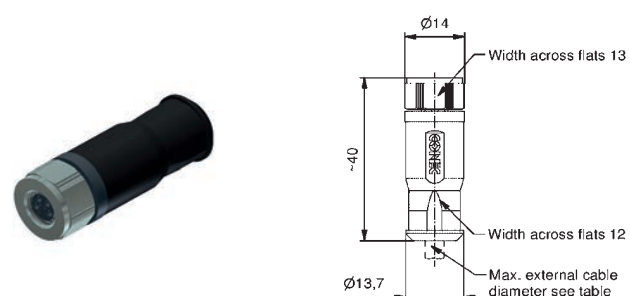

3		50 V AC / 60 V DC	3	4-5,5	0,14 - 0,34	SAL-8-RKC3-L5,5	42-00006
4		50 V AC / 60 V DC	3	4-5,5	0,14 - 0,34	SAL-8-RKC4-L5,5	42-00008