


### FIELD ATTACHABLE CONNECTORS M12 x 1


#### Screw termination

##### Female connector axial, screw termination

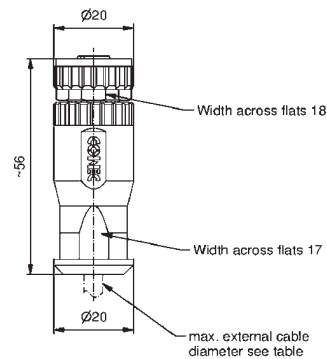

| Number of poles | Coding | Rated voltage [V] | Current rating [A] | Outer Ø cable [mm] | Wire cross section min-max [mm²] | Contact plating | Description             | Part No. |
|-----------------|--------|-------------------|--------------------|--------------------|----------------------------------|-----------------|-------------------------|----------|
| 4               | A      | 250               | 7,5                | 4-8                | 0,25 - 1,5                       | Au              | SAL-12-RKC4-S/150       | 43-00092 |
| 4               | A      | 250               | 7,5                | 4-8                | 0,25 - 1,5                       | CuSnZn          | SAL-12-RKC4-S/150/A5220 | 43-00268 |
| 5               | A      | 60                | 7,5                | 4-8                | 0,25 - 1,5                       | Au              | SAL-12-RKC5-S/150       | 43-00094 |
| 5               | A      | 60                | 7,5                | 4-8                | 0,25 - 1,5                       | CuSnZn          | SAL-12-RKC5-S/150/A5220 | 43-00269 |
| 8               | A      | 30                | 2                  | 4-8                | 0,14 - 0,5                       | Au              | SAL-12-RKC8-S           | 43-00130 |

##### Female connector axial with stainless steel coupling nut, screw termination

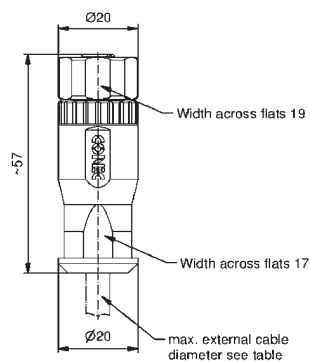

|   |   |     |     |     |            |    |                    |          |
|---|---|-----|-----|-----|------------|----|--------------------|----------|
| 4 | A | 250 | 7,5 | 4-8 | 0,25 - 1,5 | Au | SAL-12-RKCE4-S/150 | 43-00338 |
| 5 | A | 60  | 7,5 | 4-8 | 0,25 - 1,5 | Au | SAL-12-RKCE5-S/150 | 43-00339 |
| 8 | A | 30  | 2   | 4-8 | 0,14 - 0,5 | Au | SAL-12-RKCE8-S     | 43-00340 |