



SPRING CLAMP TERMINAL BLOCKS, PLUGGABLE, 5.00mm PITCH

SPRING CLAMP TERMINAL BLOCKS, PLUGGABLE, 5.00mm PITCH

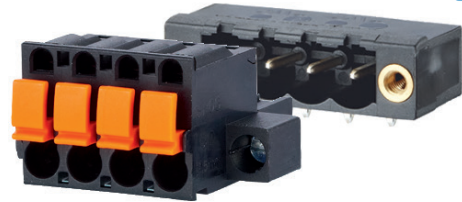

* Approval pending




Product family Pole size Color Option
SP065xxVBNF
Centerline Design Function

- spring clamp terminal block, pluggable
- centerline 5.00 mm, direction of connection vertical 0°
- color black, mounting flange
- push-button, wire entry uncodeable side parallel to plug direction

Technical data

c V / A / AWG	300 / 12 / 28 - 12		
12 A / 250 V / 4 kV / 3 / 0.08 - 2.5 mm ² / IEC 61984			
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250 V	630 V	630 V
Rated test voltage	4.0 kV	4.0 kV	4 kV
Insulating material class	CTI 600		
Rated wiring solid wire	0.08 - 2.5 mm ²		
Rated wiring stranded wire	0.08 - 2.5 mm ²		
Rated wiring solid wire	AWG 28 - 12		
Rated wiring stranded wire	AWG 28 - 12		
Clearance and creepage distances	3.5 mm		
Protection category according to IEC 60529	IP 20		
Min. insul. strip length	10 mm		
Color	black		

* Approval pending




Product family Pole size Color Option
SP065xxVBPF
Centerline Design Function

- spring clamp terminal block, pluggable
- centerline 5.00 mm, direction of connection vertical 0°
- color black, mounting flange
- finger push-button, wire entry uncodeable side parallel to plug direction

Technical data

c V / A / AWG	300 / 12 / 28 - 12		
12 A / 250 V / 4 kV / 3 / 0.08 - 2.5 mm ² / IEC 61984			
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250 V	630 V	630 V
Rated test voltage	4.0 kV	4.0 kV	4 kV
Insulating material class	CTI 600		
Rated wiring solid wire	0.08 - 2.5 mm ²		
Rated wiring stranded wire	0.08 - 2.5 mm ²		
Rated wiring solid wire	AWG 28 - 12		
Rated wiring stranded wire	AWG 28 - 12		
Clearance and creepage distances	3.5 mm		
Protection category according to IEC 60529	IP 20		
Min. insul. strip length	10 mm		
Color	black		

Dimensional drawing

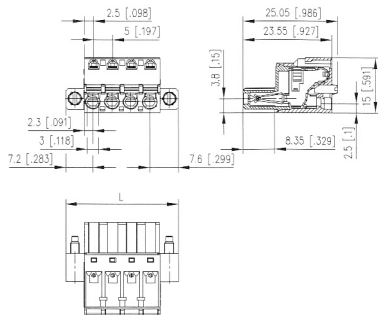

L = (Pole size - 1) * centerline + 14.8 mm (0.583 in.)


P/N

SP065XXVBNF VBNF

Complete the part number by adding the pole size.

02	03	04	05	06	07	08
09	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24					

Dimensional drawing

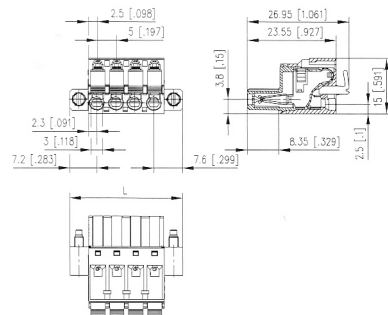

L = (Pole size - 1) * centerline + 14.8 mm (0.583 in.)

P/N

SP065XXVBPF VBPF

Complete the part number by adding the pole size.

02	03	04	05	06	07	08
09	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24					