


SPRING CLAMP TERMINAL BLOCKS, PLUGGABLE, 5.08mm PITCH



* Approval pending




Product family	Pole size	Color	Option
SP066xxVBPF			
Centerline	Design	Function	

- spring clamp terminal block, pluggable
- centerline 5.08 mm, direction of connection vertical 0°
- color black, mounting flange
- finger push-button, wire entry uncodeable side parallel to plug direction

Technical data

c 125 V / A / AWG	300 / 12 / 28 - 12
12 A / 250 V / 4 kV / 3 / 0.08 - 2.5 mm ² / IEC 61984	
Overvoltage category	III III II
Pollution degree	3 2 2
Rated voltage	250 V 630 V 630 V
Rated test voltage	4.0 kV 4.0 kV 4 kV
Insulating material class	CTI 600
Rated wiring solid wire	0.08 - 2.5 mm ²
Rated wiring stranded wire	0.08 - 2.5 mm ²
Rated wiring solid wire	AWG 28 - 12
Rated wiring stranded wire	AWG 28 - 12
Clearance and creepage distances	3.58 mm
Protection category according to IEC 60529	IP 20
Min. insul. strip length	10 mm
Color	black

Dimensional drawing

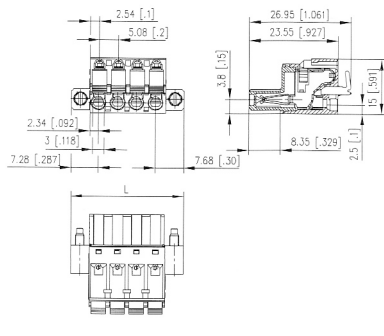

$L = (\text{Pole size} - 1) \times \text{centerline} + 14.96 \text{ mm (0.589 in.)}$

P/N

SP066XXVBPF VBPF

Complete the part number
by adding the pole size.

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24